



INDUSTRIAL DOOR OPENERS FC/AC



FC 90

FREQUENCY CONVERSION TECHNOLOGY
INDUSTRIAL DOOR OPENER



RECOMMENDATION: DOOR SIZE & WEIGHT

Standard sectional doors with cylindrical cable drum 

Door size(max.)

30m²

Door weight(max.)

390kg

High lift sectional doors with cylindrical-conical cable drum 

Door size(max.)

30m²

Door weight(max.)

390kg

Vertical lift sectional doors with conical cable drum 

Door size(max.)

30m²

Door weight(max.)

390kg

FC 120

FREQUENCY CONVERSION TECHNOLOGY
INDUSTRIAL DOOR OPENER



RECOMMENDATION: DOOR SIZE & WEIGHT

Standard sectional doors with cylindrical cable drum



Door size(max.)

40m²

Door weight(max.)

520kg

High lift sectional doors with cylindrical-conical cable drum



Door size(max.)

40m²

Door weight(max.)

520kg

Vertical lift sectional doors with conical cable drum



Door size(max.)

40m²

Door weight(max.)

520kg

AC 90

INDUSTRIAL DOOR OPENER



RECOMMENDATION: DOOR SIZE & WEIGHT

Standard sectional doors with cylindrical cable drum

Door size(max.)

30m²

Door weight(max.)

390kg

High lift sectional doors with cylindrical-conical cable drum

Door size(max.)

30m²

Door weight(max.)

390kg

Vertical lift sectional doors with conical cable drum

Door size(max.)


30m²

Door weight(max.)

390kg

AC 140

INDUSTRIAL DOOR OPENER

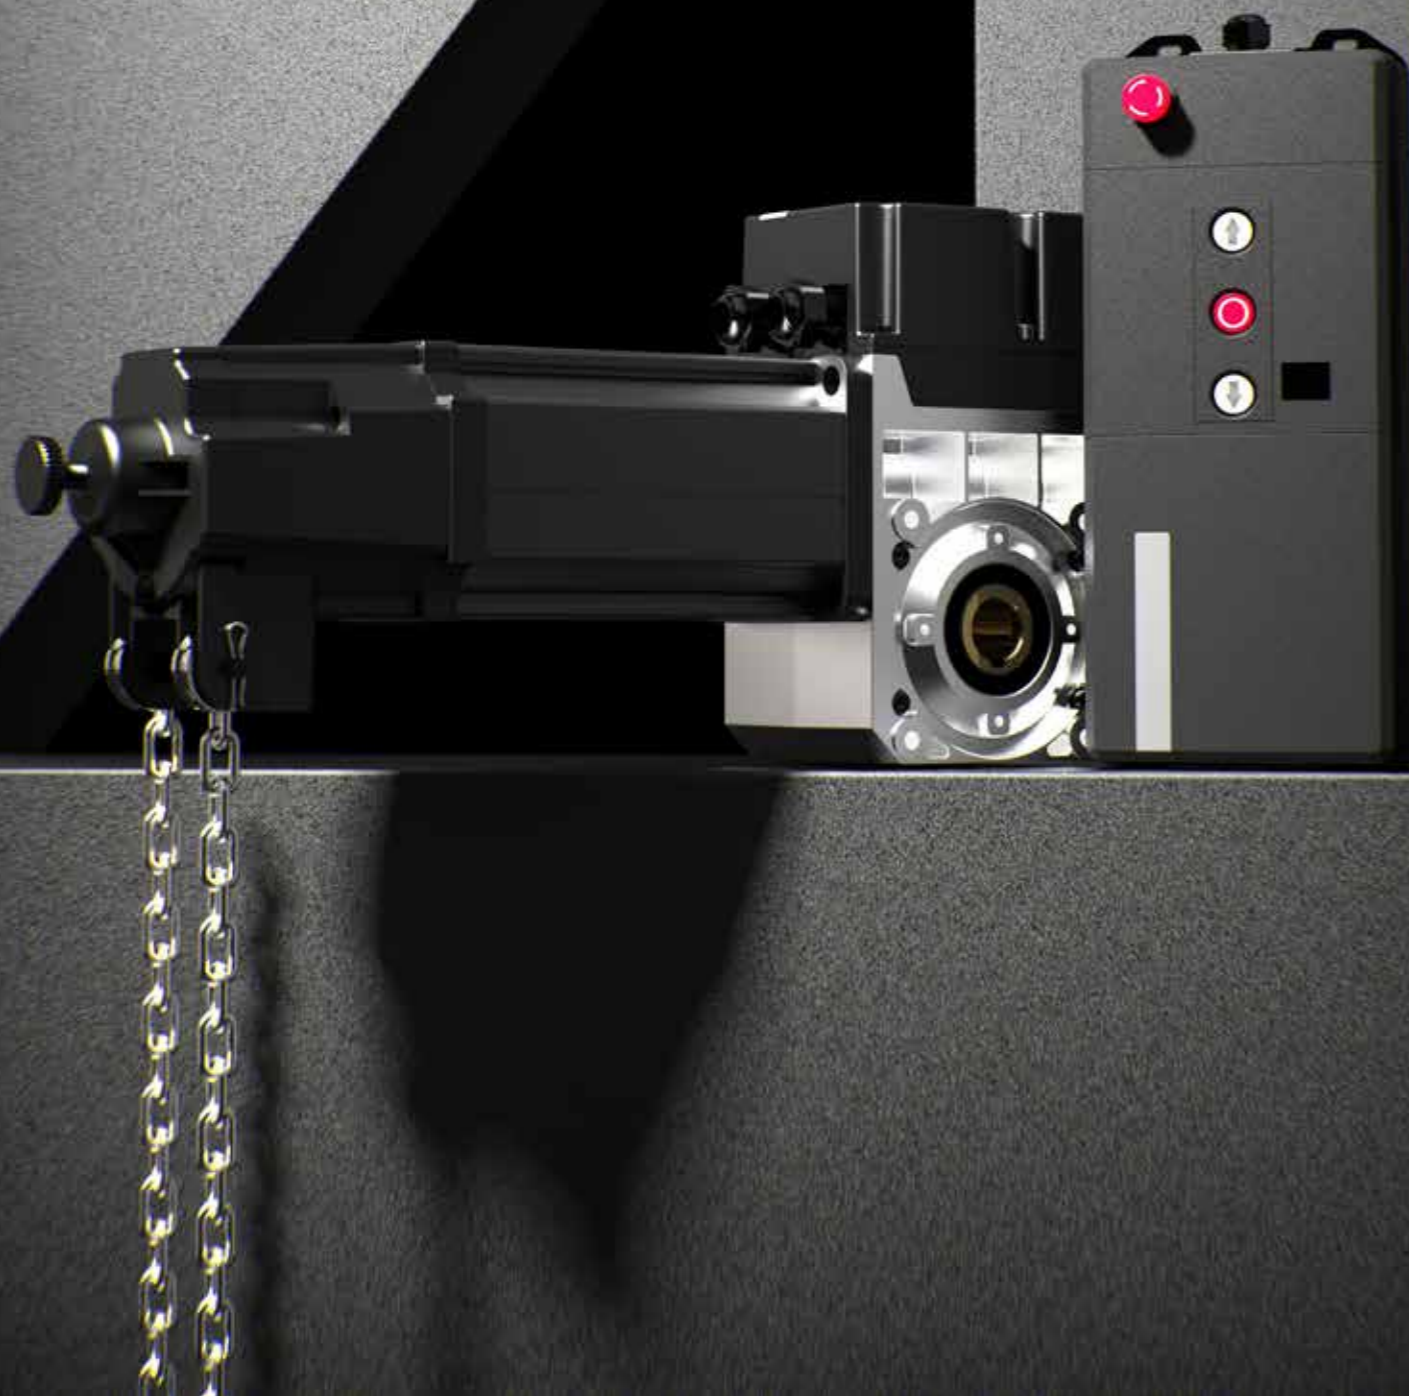

RECOMMENDATION: DOOR SIZE & WEIGHT

Standard sectional doors with cylindrical cable drum

Door size(max.)

40m²

Door weight(max.)

520kg

High lift sectional doors with cylindrical-conical cable drum

Door size(max.)

40m²

Door weight(max.)

520kg

Vertical lift sectional doors with conical cable drum

Door size(max.)

40m²

Door weight(max.)

520kg



ACCESSORIES



ACCESSORIES FOR INDUSTRIAL DOOR OPENER



FC CONTROL BOX

Control unit for FC IDO.



AC CONTROL BOX

Control unit for AC IDO.



OPTICAL EDGE SENSORS KITS

It contains a pair of photocells, spacers and connection cables, four-core spiral cable, connection box, steel holder.



OPTICAL EDGE SENSORS SET

Includes a pair of photocells, spacers and connecting cables.



WARNING LIGHT

AC/DC 12-240V
Horizontal & Vertical installation supported.



CHAIN HOIST ASSY

With 5m hand chain.



WIRES SPIRAL CABLE

3,5m or 5,5m spiral cable
4 or 5 cores.



EXTENSION SHAFT ASSY

For various types of torsion shafts.



MAIN POWER SWITCH

for AC/FC control unit.



SD PROTECTION DEVICE

12-24V AC/DC
Wireless securing of integrated entrance doors.



Connection cable
(10 cores)
for AC/FC control unit.



Power cable
three-pole 230V
for AC/FC drives
(single phase).



Chain
extension
kit.



RADIO KIT

2x transmitter RC07 868MHz
1x plug in receiver card 868MHz.



WIFI MODUL

USB WIFI module for industrial door opener.



Ring for shaft.



Heavy bracket



Chain hanger
bracket.



KRUŽÍK s.r.o.

Veleslavínova 2357
767 01 Kroměříž
Czech Republic

Tel +420 800 100 231
+420 573 336 233

E-mail kruzik@kruzik.cz

www.kruzik.eu
www.kruzik.cz

BRANCH PRAGUE

Herbenova 38
102 00 Praha 10 Hostivař
tel.: +420 267 710 901
tel.: +420 267 710 696
e-mail: praha@kruzik.cz

KRUZIK UKRAINE

s. Ivanivtsi, ul. Miru, 3
Mukachevo 89622
tel.: +38 0964585699
tel.: +38 0505235969
e-mail: kruzik@kruzik.com.ua
www: www.kruzik.com.ua

